



V3

Robust and powerful, pneumatic operated fiber blowing machine designed for single cables and for relining of multiple micro ducts. Configuration can be made for cable between 4 and 40 mm and duct dimensions between 10 and 63 mm. The unique Joystick controller and the agile motors securing an optimal control of the installation. With an anodized aluminum construction, the machine is lightweight but still very strong.



FIBER BLOWING MACHINE FOR CABLE 4-40 MM / DUCT 10-63 MM

- Pneumatic operation, double motors.
- Electronic counter for speed and distance.
- Gentle operation with long contact surface on the cable.
- Display for speed, distance and pressure in duct.
- Max. speed 120 m/min, max pushing force on cable 1200 N.
- Adjustable clamping force.
- Option of sub-ducting kit for installing several micro ducts. Example: 7x7/3.5 mm or 4x14/10 mm in a 50 mm tube simultaneously.
- Works with JetLogger
- Joystick Controller with forward and reverse function.
- Duct air quick release valve.

NEW FUNCTIONS!


Duct Air Release: Duct Air Release Valve, making the reduction of air from the duct very fast.

TECHNICAL DATA

-  **Max pressure:**
16 Bar
-  **Pushing force:**
up to 1200 N
-  **Cable diameter:**
4 - 40 mm
-  **Duct diameter:**
10 - 63 mm
-  **Weight:**
approx 22 kg
-  **Air connection:**
1" Claw connector
-  **WxHxD**
700x300x310



V3 FIBER BLOWING MACHINE

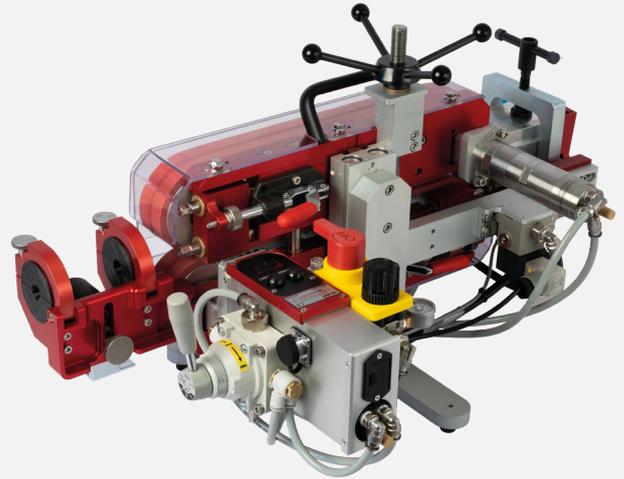

V3 FIBER BLOWING MACHINE



DUCT CLAMP (AVAILABLE FOR 10-63 MM DUCT)




AFTERBLOWER




CABLE GUIDE (AVAILABLE IN 5 DIFFERENT SIZES)



V3 DUCT CLAMP AND DUCT POSITIONER



JOYSTICK CONTROLLER



DUCT AIR VALVE



AIR REGULATOR WITH EMERGENCY STOP

STD CONFIGURATION V3

- Transport case
- Extra fixtur
- 1 bottle Micro Duct Lube
- 1 bottle Duct Lube
- 1 bottle pneumatic oil
- Service kit
- 12 mm cabels guides

ACCESSORIES FOR V3

- Afterblower
- Floating kit
- 9-12 V adaptor. For replacing 9 V battery for digital display
- Duct air quick release valve
- Jetlogger
- Duct clamps
- Cabel guides for 15, 22, 26 and 34 mm
- Cabel seals