



IPR7334X / IPR7338X

DAY & NIGHT 3MP HD VARI-FOCAL IR IP CAMERA




As with all Pro series cameras, the IPR7334X/IPR7338X incorporates Sense up+, a unique technology that successfully delivers stunning video in low-light conditions. Utilizing intelligent image signal processing, AGC control, and 3D Noise Reduction, this model successfully delivers the ultimate low-light image without motion blur. The IPR7334X/IPR7338X is capable of producing four independent video streams, different streams can be set for different applications, depending on the individual user requirements. The IP66-rated housing is designed to help the camera body withstand rain and dust and ensures operation under a multitude of harsh weather conditions.

FEATURES :


- Full HD 3.27 megapixel CMOS image sensor
- True H.264 AVC/MPEG-4 part 10 real-time Video compression
- H.264 and Motion JPEG multi-profile Video streaming
- 3D Noise Reduction (MCTF)
- 2D WDR function
- Digital PTZ supported
- Face / tampering / audio / motion / alarm detection
- Cable managed housing and bracket
- High efficiency IR LED, Radiant distance up to 70m
- Day & Night (IR cut removable)
- 2-way audio supported
- Digital I/O : 1 in, 1 out
- ONVIF supported

DIMENSIONS : (Unit : mm)

Body : 146 x 154 x 374 (W x H x D) Bracket : 211.5 (L)

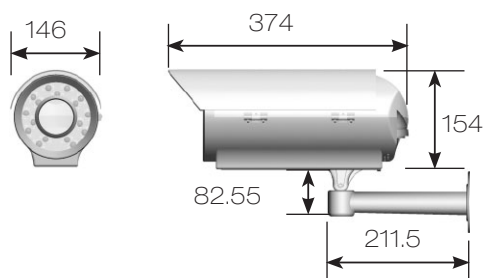

INSTALLATION HOLE SITE DIAGRAM :

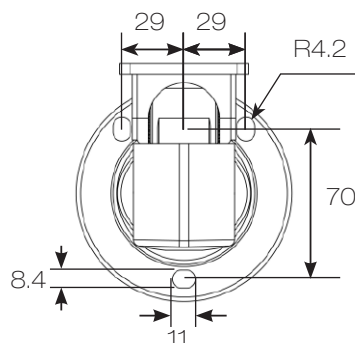

SPECIFICATION :

Name			Day & Night 3MP HD Vari-focal IR IP Camera		
Model			IPR7334SX5		IPR7338SX5
Lens	Focal length		5 – 50 mm		
	Iris		F1.6		
	Angle of view	H	58.8° – 6.5°		
		V	33.9° – 3.7°		
		D	66.9° – 7.4°		
Pick up element			1/2.8" CMOS image sensor		
Effective pixels			2096 (H) x 1561 (V) = 3,271,856 (pixel)		
Chip size			7.96mm (H) x 7.61mm (V)		
Scanning system			Progressive scan		
Infrared cut filter			Auto / schedule / day (color) / night (mono)		
Min. illumination			0.3 Lux at F1.6 (Low light mode) / 0 Lux with IR LED on		
White balance			Auto / tungsten / indoor / fluorescents1 / fluorescents2 / outdoor1 / outdoor2		
Back light compensation			Off / on		
Electrical shutter			1/30s – 1/8000s		
Sense up			Off / 1 frame / 2 frames / 3 frames / 7 frames		
Sense up +			Yes		
Auto gain control			36 dB variable gain		
3D Noise Reduction			Off / 1 – 32 selectable		
2D WDR			Off / auto / x2 / x3 / x4		
Privacy masking			Off / on (4 zones)		
Image effects			Brightness, Contrast, Hue, Saturation, Sharpness, Mirror, Flip		
Live Video output			CVBS 1.0Vp-p, 75 ohm, BNC connector		
Audio in / output			Mono, 1.4 Vp-p , 50 K Ω , Terminal connector		
IP rating			IP66		
Blower control			On : 35°C , Off : 25°C		
Heater control			On : 15°C , Off : 25°C		
Window			Ø110 heat resistant glass		
Infrared LED	Peak wavelength		850nm		
	Beam spread		6°		
	Radiant distance		70M		
Operating temperature			-40°C – +50°C (-40°F – 122°F)		
Dimension			Body : 146mm(W) x 154mm(H) x 374mm(D), Bracket : 211.5mm(L)		
Weight			3800g		
Power supply			AC24V (±10%)		AC100 – 240V (±10%)
Power consumption			33W(Heater Off) / 40W(Heater On)		

Network		
Video compression		H.264 , Motion JPEG
Resolution		3MP(2048 x 1536), 1080P(1920 x 1080), 720P(1280 x 720), D1(720 x 480), CIF(352 x 240)
Multiple profile	Profile #1	H.264 : up to 30 FPS @ 1920 x 1080, MJPEG : up to 30 FPS @ 720 x 480
	Profile #2	H.264 : up to 30 FPS @ 1280 x 720, MJPEG : up to 30 FPS @ 352 x 240
	Profile #3	H.264 : up to 30 FPS @ 1920 x 1080, MJPEG : up to 30 FPS @ 1280 x 720
	Profile #4	H.264 : up to 30 FPS @ 720 x 480, MJPEG : up to 15 FPS @ 1920 x 1080
	Profile #5	H.264 : up to 15 FPS @ 2048 x 1536, MJPEG : up to 15 FPS @ 720 x 480
Video streaming		RTP/HTTP, RTP/TCP, RTP/UDP, Multicast
Video bitrate		128Kbps – 5Mbps
		Frame rate and bit rate controllable on-the-fly
		VBR / CBR / GOP supported
Security		Base64 HTTP encryption
		Multiple user access levels with password protection
		10 user accounts available
Users		8 simultaneous users
ePTZ & digital zoom		Yes, ROI is supported
OSD		Text overlay for date, time, and camera name
Alarm function		Alarm / motion / tampering / face / alarm detection triggering recording into SD card
		Image upload over FTP and E-mail by face / tampering / audio / motion detection
CPU, memory		Embedded SoC ARM11, 528MHz, 256MB DDR2, 256MB flash memory
Maintenance		Firmware update via HTTP
		Firmware available at web site
Network interface		10Mbps / 100Mbps Base-T, RJ-45
PC requirement		OS : Windows 2000, Windows XP, Windows Vista, Windows 7, Windows 8
		Browser : Windows Internet Explorer 6.0 or above
		CPU : intel pentium 4 1.8GHz or above
		RAM : 1GB or above, independent display card
Network protocols		IP, TCP, UDP, HTTP, SMTP, NTP, DDNS, UPnP, FTP, ARP, DHCP, PPPoE, DNS, RTSP, RTCP, Telnet, ICMP, IGMP, ONVIF Profile S, SNMP, SIP, Bonjour
Mobile phone		iPhone, iPad, and Android support
System integration		ONVIF & LILIN HTTP API
Central management system		CMX 3.6 / NAV 1.0 support
Video display		LILIN Universal ActiveX & LILIN Java Applet
OS		Embedded Linux 2.6.32
Two-way audio		G.711 / PCM
SD card recording		Support SD/SDHC card for circular recording (card is not included)
Alarm input / output		Digital 1 input (TTL, +3 – 5VDC) / 1 Output (MOS Relay contact N.O., Load max. 40VDC/300mA)



No liability will be accepted for any errors or omissions. Design and specifications are subject to change without notice.