



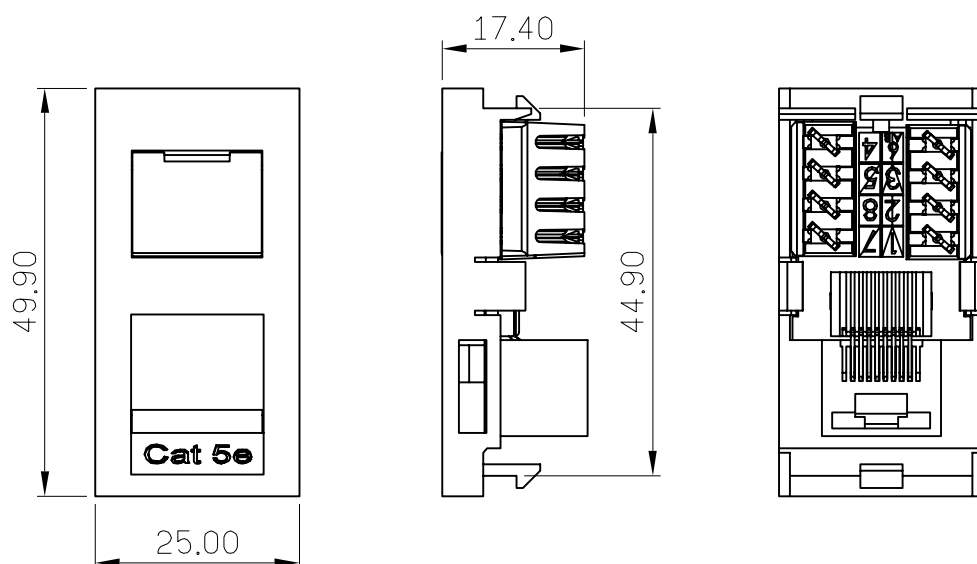

Next Generation Connectivity

NN5EMODUTPWH - NENCO CAT5E UTP LOW PROFILE SHUTTERED MODULE 25X50MM WHITE

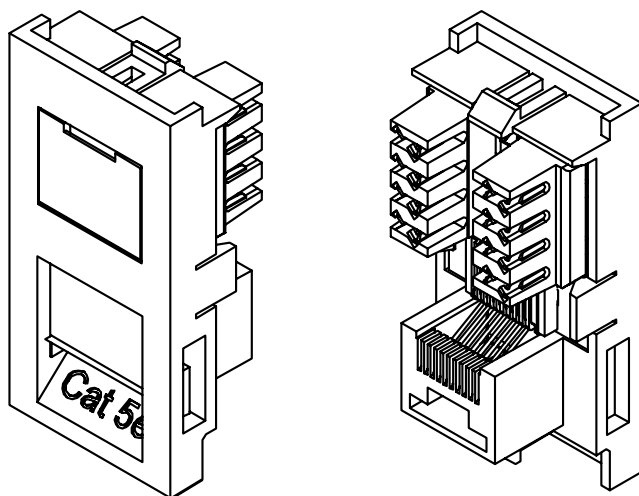

MATERIAL

MODULE HOUSING: ABS UL 94V-0

SPRING WIRE: PHOSPHOR BRONZE GOLDPLATED 50V OVER NICKEL

IDC PLASTIC: PC UL94V-0

IDC CONTACT: PHOSPHOR BRONZE WITH "AG OVER 100U"

NICKEL UNDERCOAT

IDC BLOCK: 200 TERMINATION CYCLES

MODULAR JACK: 750 MATING CYCLES

SUITABLE IMPACT TOOL: KRONE STYLE PUNCH DOWN TOOL

ELECTRICAL

INSULATION RESISTANCE : 500 MΩ.

DIELECTRIC WITHSTANDING VOLTAGE : 1000 V

DC CURRENT RATING : 1.5 Amps.

DC RESISTANCE : 0.1Ω.

CONTACT RESISTANCE : 20mΩ.

