


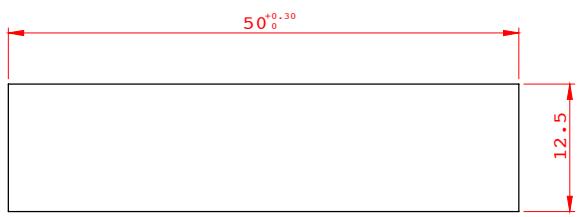










Next Generation Connectivity

NNQBW - NENCO QUARTER BLANK

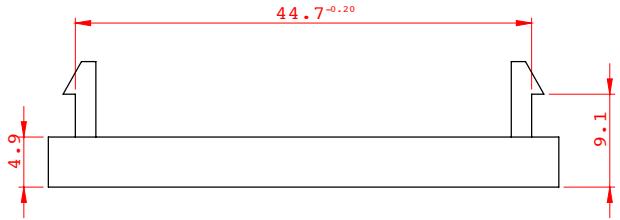

NNHBW - NENCO HALF BLANK

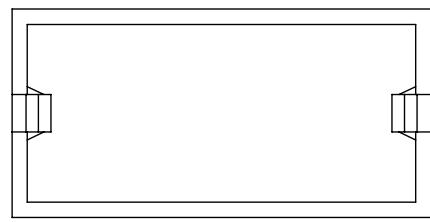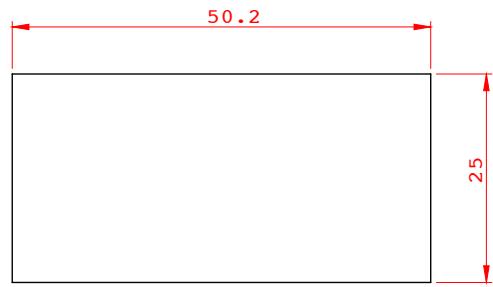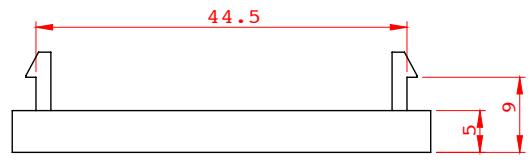

Material: ABS High- Impact UL94V-0 (Thermoplastic)

Operating Temperature Range: -10°C to 60°C

Storage Temperature Range: -40°C to 68°C

Humidity: 10% -90% RH

