

# Full Length Blanking Shade

## specifications

The full length blanking shade shall blank out as few as four rack units, or as many as 45 consecutive rack units. The upper housing of the full length blanking shade shall contain a rolled fabric material secured to a spring roller and be designed for installation in the upper rack units of the rack or cabinet. The bottom handle of the adjustable shade can then be secured to the appropriate rack unit using sliding latches to blank out the desired number of rack units. Hand tools shall not be required for installation.



## technical information

<b>Material:</b>	Metal components – cold rolled steel, powder coated Fabric components – vinyl laminate
<b>Standards:</b>	Suitable for 19.00" width (482.6mm) vertical mounting rails that meet CEA-310-E standards; fabric material meets ASTM D6413
<b>Compatibility:</b>	Solution suitable for 0.38" (9.5mm) square or #10 (M5) and #12 (M6) round tapped holes typically found in EIA vertical mounting rails
<b>Temperature range:</b>	0°C to 50°C (32°F to 122°F) continuous; 70°C (158°F) intermittent
<b>Electrostatic dissipative (ESD):</b>	Surface resistivity is 3.0 x 10 <sup>4</sup> ohms per unit square
<b>RoHS compliance:</b>	Compliant

## key features and benefits

<b>Spring roller with retractable fabric material</b>	Allows fabric to be retracted and stored within its own housing; reduces space required to store blanking products
<b>Impermeable fabric</b>	Minimizes bypass airflow through consecutive open rack units; separates the hot aisle from the cold aisle to help decrease energy costs
<b>Component installation behind vertical mounting rails</b>	Reduces the chance of hot exhaust air from re-circulating to the front (intake) of the network equipment, preventing overheating of active network equipment
<b>Thumb screw installation for top housing</b>	Allows for efficient installation of the main housing; thumb screws eliminate the need for tools and also provides a very secure means of mounting
<b>Latch design for bottom pull</b>	Allows for quick and easy deployment and retraction of the blanking material
<b>ESD materials with grounding capabilities</b>	Reduce the chance of corrupting network equipment with electrical shock by providing a path to ground
<b>Variable floating fasteners/locator pins</b>	Allow for variability in horizontal spacing of vertical mounting rails
<b>Removable bullet nose fastener</b>	Allows installation of the same part number on vertical mounting rails with either square or round tapped holes
<b>Shade locator guide in housing</b>	Forces fabric material to contact vertical mounting rail to improve sealing capabilities

## applications

The full length blanking shade is designed to provide a blanking solution for racks and cabinets that have a large number of consecutive open rack units. The full length blanking shade is designed to be adjustable so when new cabinets are put in place, or when equipment is being serviced, the shade can be deployed to easily and efficiently blank out unused rack units. An impermeable fabric

material coiled on a spring roller can be deployed or retracted to accommodate the required open rack units. A latch design, on the bottom handle, allows easy installation on the vertical mounting rails of most standard racks and cabinets. The blanking shade provides an easy solution to reduce bypass air; thereby, decreasing energy costs.

[www.panduit.com](http://www.panduit.com)

### Full Length Blanking Shade

**Full length blanking shade to blank out 4 – 45 consecutive rack units:** FLBSIMS

### Tool-Less Blanking Panels

<b>1 RU x 19.00" (482.6mm) width for 3/8" square cage nut holes:</b>	TLBP1S-V
<b>2 RU x 19.00" (482.6mm) width for 3/8" square cage nut holes:</b>	TLBP2S-V
<b>1 RU x 19.00" (482.6mm) width for round tapped holes:</b>	TLBP1R-V
<b>2 RU x 19.00" (482.6mm) width for round tapped holes:</b>	TLBP2R-V
<b>1 RU x 19.0" (482.6mm) width for 3/8" square cage nut holes; includes pass-through area:</b>	TLBPBPT1S

### Cool Boot® Grommets (New Installations)

<b>6" x 8" (152 x 203mm):</b>	RFG6X8Y
<b>8" x 8" (203 x 203mm):</b>	RFG8X8Y
<b>10" x 8" (254 x 203mm):</b>	RFG10X8Y
<b>12" x 8" (305 x 203mm):</b>	RFG12X8Y
<b>12" x 4" (305 x 102mm):</b>	RFG12X4Y
<b>4.50" diameter (114.3mm):</b>	RFG3DY
<b>6.50" diameter (165.1mm):</b>	RFG5DY


### Cool Boot® Grommets (Retrofit Applications)

<b>6" x 8" (152 x 203mm):</b>	RFG6X8SMY
<b>8" x 8" (203 x 203mm):</b>	RFG8X8SMY
<b>10" x 8" (254 x 203mm):</b>	RFG10X8SMY
<b>12" x 8" (305 x 203mm):</b>	RFG12X8SMY
<b>12" x 4" (305 x 102mm):</b>	RFG12X4SMY
<b>4.50" diameter (114.3mm):</b>	RFG3DSMY
<b>6.50" diameter (165.1mm):</b>	RFG5DSMY

## Full Length Blanking Shade

## ordering information

Part Number	Description	Std. Pkg. Qty	Std. Ctn. Qty.
<b>FLBSIMS</b>	Full length blanking shade blanks out 4 – 45 consecutive rack units on standard 19.00" (482.6mm) wide vertical mounting rails; black.	1	1

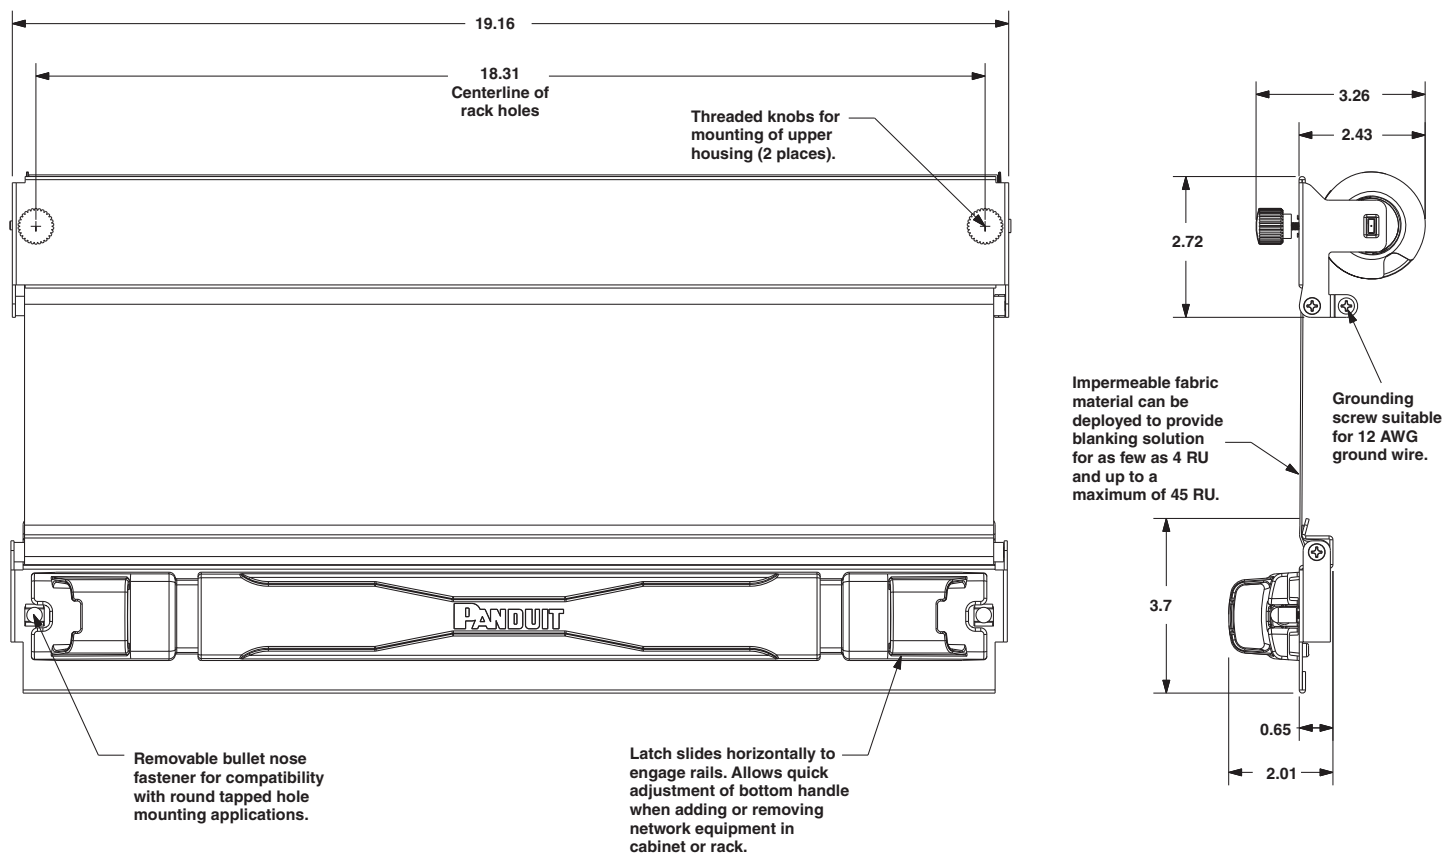

Dimensions are in inches.

## WORLDWIDE SUBSIDIARIES AND SALES OFFICES

**PANDUIT CANADA**  
Markham, Ontario  
cs-cdn@panduit.com  
Phone: 800.777.3300

PANDUIT EUROPE LTD.  
London, UK  
cs-emea@panduit.com  
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.  
Republic of Singapore  
cs-ap@panduit.com  
Phone: 65.6305.7575

PANDUIT JAPAN  
Tokyo, Japan  
cs-japan@panduit.com  
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA  
Guadalajara, Mexico  
cs-la@panduit.com  
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.  
Victoria, Australia  
cs-aus@panduit.com  
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to [www.panduit.com/warranty](http://www.panduit.com/warranty)

### For more information

**Visit us at [www.panduit.com](http://www.panduit.com)**

**Contact Customer Service by email: [cs@panduit.com](mailto:cs@panduit.com)  
or by phone: 800.777.3300**

©2014 Panduit Corp.  
ALL RIGHTS RESERVED.  
**RKSP137--WW-ENG**  
Replaces WW-WASP19  
1/2014

**PANDUIT®**