


# QSFP28 to 4 SFP28 25/100G Direct Attach Copper Cables


Siemon QSFP28 to 4 SFP28 Passive Direct Attach Copper Cable assemblies exceed 100G Ethernet (100GBASE-CR4) specifications. They are designed for high-density applications, offering a cost-effective, low-power option for high-speed data center interconnects. This next generation product shares the same mating interface with QSFP+ (SFF-8436) and SFP+ (SFF-8431) form factors, making it backward compatible with existing QSFP+ and SFP+ equipment ports. These direct attach cable assemblies are available in standard lengths up to 5 meters for support of up to 100G (4x25G) Ethernet applications.

## Applications

- Ethernet 10G, 25G, 40G, 100G (25GBASE-CR, 100GBASE-CR4)
- Rack-to-Rack
- Top-of-Rack
- Switch-to-Switch
- Switch-to-Server
- Networking
- Storage
- Hubs
- Routers
- Servers
- NIC

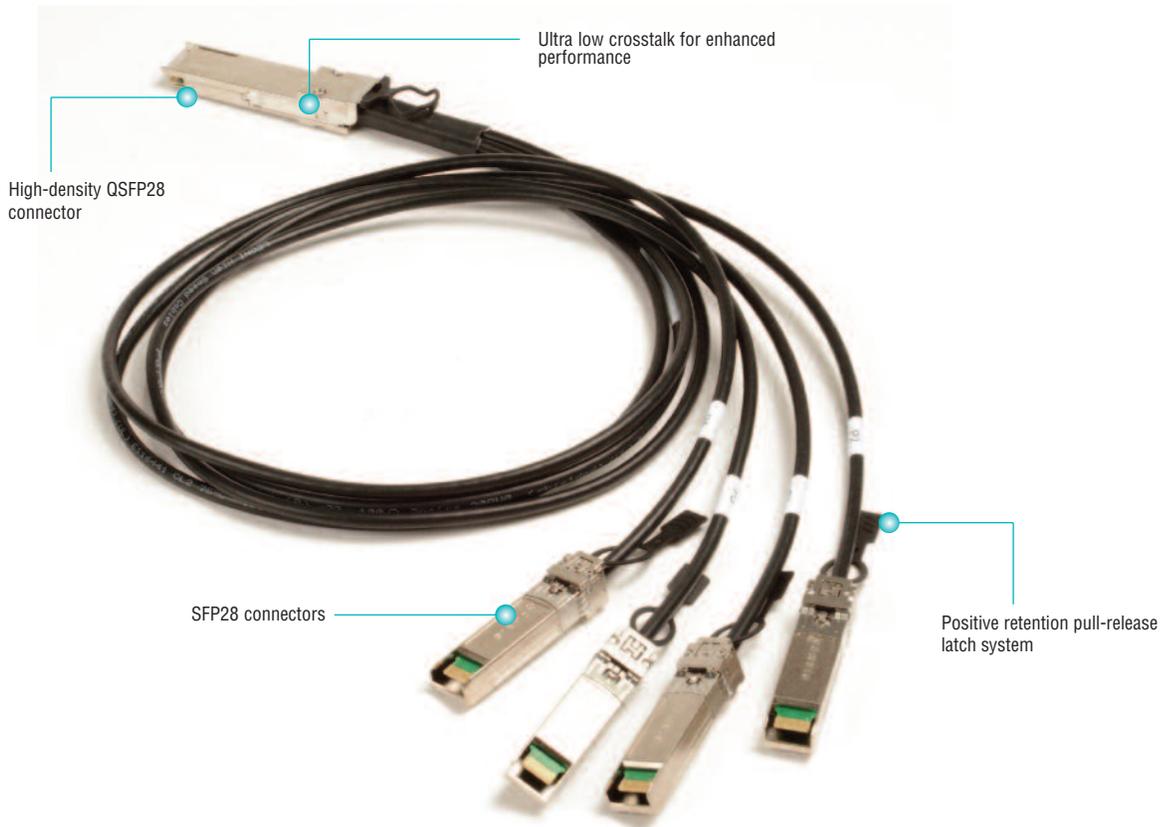

## PCB Termination

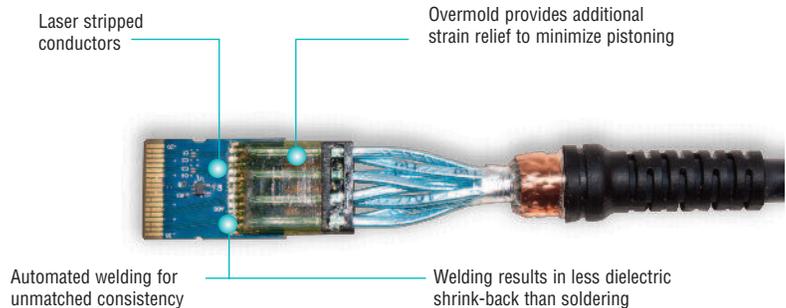

# QSFP28 to 4 SFP28 25/100G Direct Attach Copper Cables

## Ordering Information:

QSFP28 to 4 SFP28 Passive Copper Cable Assemblies

Part Number	Length	Gauge
Q4S28P300.5-01(X)	0.5m (1.6 ft.)	30
Q4S28P301.0-01(X)	1m (3.3 ft.)	30
Q4S28P301.5-01(X)	1.5m (4.9 ft.)	30
Q4S28P302.0-01(X)	2m (6.6 ft.)	30
Q4S28P262.5-01(X)	2.5m (8.2 ft.)	26
Q4S28P263.0-01(X)	3m (9.8 ft.)	26
Q4S28P265.0-01(X)*	5m (16.4 ft.)	26

Use (X) to specify jacket: L = CL2/LS0H, P = PVC

All cables compliant to IEEE 802.3by, CA-N. Will work with or without FEC unless otherwise noted.

\*Compliant to IEEE 802.3bj, CA-L. Will work with RS-FEC.

## PERFORMANCE SPECIFICATIONS

Electrical	
Min. Dielectric Withstand Voltage	300 VDC
Insulation Resistance	1000 MΩ
Current Rating	0.5 Amp Min/Signal Contact
General	
Operating Temperature	-5 to 70° C (32 to 158° F)
Flammability Rating (Plastics)	UL 94
Green Features	RoHS, Lead-Free
Shield	Braid/Foil
Marking	Mfg Name, Part #, Date Code

Plug	
Backshell Material	Nickel Plated Zinc Diecast
Contact Material	PCB with Gold-Plated Pads
Latch	Positive Latching with Nylon Pull Tab
Insertion Force	QSFP28: 40N (9.0 lbf.) Max SFP28: 18N (4.0 lbf.) Max
Withdrawal Force	QSFP28: 30N (6.7 lbf.) Max SFP28: 12.5N (2.8 lbf.) Max
Retention Force	90N (20.2 lbf.) Min
Durability	QSFP28: 250 Cycles Min SFP28: 250 Cycles Min
Cable	
Conductor	Solid
Wire Gauge	30 AWG and 26 AWG
Impedance	100 +/- 10 ohms
Construction	Twinaxial
Cable OD	30 AWG = 4.5mm (0.177 in.)
	26 AWG = 6mm (0.236 in.)
Jacket Type	PVC or CL2/LS0H
Bend Radius	5X Cable OD - Single 10X Cable OD - Repeated

Standards Compliance	
QSFP28 End	
IEEE 802.3by, IEEE 802.3bj	
SFF-8636, SFF-8661, SFF-8665, SFF-8697	
RoHS	
SFP28 End	
802.3by	
SFF-8402, SFF-8419, SFF-8432	
RoHS	

Because we continuously improve our products, Siemon reserves the right to change specifications and availability without prior notice.

<b>Worldwide Headquarters</b> <b>North America</b> Watertown, CT USA Phone (1) 860 945 4200	<b>Regional Headquarters</b> <b>Europe Russia Africa</b> Chertsy, Surrey, England Phone (44) 0 1932 571771	<b>Regional Headquarters</b> <b>China</b> Shanghai, P.R. China Phone (86) 215385 0303	<b>Regional Headquarters</b> <b>Latin America</b> Bogota, Colombia Phone (571) 657 1950/51/52	<b>Regional Headquarters</b> <b>India Middle East</b> Dubai, United Arab Emirates Phone (971) 4 3689743	<b>Regional Headquarters</b> <b>Asia Pacific</b> Sydney, Australia Phone (86) 21 5385 0303	<b>Siemon Interconnect Solutions</b> <b>Watertown, CT USA</b> Phone (1) 860 945 4213 US www.siemon.com/SIS
--	---	--	--	--	---	---